## The CJV150 series turns an idea into reality

High-quality printing and sharp, accurate cutting generate fresh, brilliant ideas.





## Width: 0.8 m

### Suitable for simple stickers and labels

Small-footprint CJV150-75 is suitable for stickers, labels, artistic posters, and point of sales materials.

mmm



## Width: 1.1 m

Suitable for quick POPs and large-size posters

The CJV150-107 delivers a quick output mimaki.com while preserving product quality.



1111111

## **CJV150-130**

## Width: 1.3 m

Suitable for variously sized signage and point-of-sale marketing materials

The wider but modestly-sized CJV150-130 meets variable design demands.



## Width: 1.6 m

Suitable for cost effective production of large, high-quality signage and vehicle wrapping films

The CJV-150-160 has the widest working width among the models, and satisfies a wide range of market demands including quality and cost.



# **Raster Link**

Web update function is supported

Supports the Web update function that has been well-received in RasterLinkPro5 Program update and profile download can be easily performed via internet.

#### Specifications CJV150-75 CJV150-1 Item nthead rint resolution 360 dpi, 800 mm (31.4 in) 1.090 mm (42.9 ximum print width mum media width 810 mm (31.8 in) 1.100 mm (43.3 Type/Color Eco-solvent ink SS21 (C, M, Y, K, Lc, Lm, Lk, Or, W, Si) BS3 (C, M, Y ES3 (C, M, Y, K, Lc, Lm, W) BS4 (C, M, Y SS21: 440 ml Ink cartridge/2 L Ink pack\*2, BS3: 600 ml Package size ES3: 440 ml Ink cartridge\* BS4: 600 ml l MCT (Mimaki Circulation Circulation svs ledia thickness olled media weight VCCI cla ertifications CE Marking (EMC **RoHS** USB 2 erface ower supply Single-pl wer consumption Temperature: 20-30°C perational environment ensions (W $\times$ D $\times$ H) 1,965 mm × 700 mm × 1,392 mm (77 in × 28 in × 55 in) 2,255 mm × 700 mm × (89 in × 28 in × 55 126 ko 142 kg

\*1: Sb53 ink is not compatible with CJV150-75. \*2: White and silver are provided in 220 ml lnk cartridge only

White and show are provided in 220 ml link cartridge only.
White is provided in 220 ml link cartridge only.
Optional MBIS3 (Mimaki Bulk Ink System3) is required for using 2 L lnk pack.
Eco case 4 (OPT-J0361) is required for using 600 mL inkpack.

Sup	plies											
ltem	Color	Item No.	Remarks		Color	Item No.	Remarks		Item	Color	Item No.	Remarks
S21	Cyan	SPC-0501C		BS3	Cyan	SPC-0667C		[	BS4	Cyan	BS4-C-60	
	Magenta	SPC-0501M			Magenta	SPC-0667M	600 ml Ink pack			Magenta	BS4-M-60	600 ml ink pack
	Yellow	SPC-0501Y	1		Yellow	SPC-0667Y				Yellow	BS4-Y-60	
	Black	SPC-0501K			Black	SPC-0667K				Black	BS4-K-60	
	Light Cyan	SPC-0501LC	440 ml Ink cartridge		Cyan	SPC-0693C	2,000 ml Ink pack			Cyan	BS4-C-2L	2,000 ml ink pack
	Light Magenta	SPC-0501LM			Magenta	SPC-0693M				Magenta	BS4-M-2L	
	Orange	SPC-0501Or			Yellow	SPC-0693Y				Yellow	BS4-Y-2L	
	Light Black	SPC-0501Lk			Black	SPC-0693K		ļ		Black	BS4-K-2L	
	White	SPC-0504W-2	220 ml Ink cartridge	Sb53	Blue	SB53-BL-44			Sb54	Blue	SB54-BLT-44	
	Silver	SPC-0504Si	220 ml Ink cartridge		Magenta	SB53-M-44	440 ml Ink cartridge			Magenta	SB54-MT-44	440 ml Ink cartridge
		SPC-050431	220 mi mk cartiluge		Yellow	SB53-Y-44				Yellow	SB54-YT-44	
	Cyan				Black	SB53-K-44				Black	SB54-KT-44	
	Magenta	SPC-0588M			Deep Black	SB53-DK-44				Light Blue	SB54-LBT-44	
	Yellow	SPC-0588Y		Light Blue SB53-LBL-44 Light Magenta	SB54-LMT-44							
	Black	SPC-0588K	2,000 ml Ink pack	Blue SB53-BL-2L Magenta SB54-MT-2L								
	Light Cyan	SPC-0588LC	2,000 111 1110 paole		SB54-MT-2L							
	Light Magenta	SPC-0588LM			Magenta	SB53-M-2L				Yellow	SB54-YT-2L	2,000 ml Ink pack
	Orange	SPC-0588Or			Yellow	SB53-Y-2L				Black	SB54-KT-2L	
	Light Black	SPC-0588Lk		Black	SB53-K-2L	2,000 ml Ink pack			Light Blue	SB54-LBT-2L		
					Deep Black	SB53-DK-2L		L		Light Magenta	SB54-LMT-2L	
					Light Blue	SB53-LBL-2L						
					Light Magenta	SB53-LM-2L						

Some of sample images in this brochure are simulated. Specifications, design and dimensions stated in this catalogue may be subject to change without notice (for technical improvements, etc). The corporate names and merchandise names written on this catalogue are the trademark or registered trademark of the respective corporations. Print colors may slightly vary after replacing printheads because a high-resolution inkjet printer controls extremely small ink droplets. Also note that if using multiple printer units, colors could vary slightly from one unit to other unit due to slight individual differences.

MIM CK mimaki.com

MIMAKI ENGINEERING CO., LTD.

2182-3 Shigeno-otsu, Tomi-city, Nagano 389-0512, Japan Tel: +81-268-78-2288 trading@mimaki.jp

### Mimaki Global Network

MIMAKI USA, INC. MIMAKI BRASIL COMERCIO E IMPORTACAO LTDA MIMAKI INDIA PRIVATE LIMITED

Europe MIMAKI EUROPE B.V. Indonesia PT. MIMAKI INDONESIA Australia MIMAKI AUSTRALIA PTY. LTD. China SHANGHAI MIMAKI TRADING CO I TD

Brazil India Singapore MIMAKI SINGAPORE PTE. LTD.

USA Taiwan MIMAKI ENGINEERING (TAIWAN) CO., LTD.

It would mean nothing to provide high-performance software with a variety of useful functions if the software itself is too difficult and complicated to use... he newly developed RasterLink software was designed to be extremely user-friendly with this idea in mind. With a wide variety of newly added features, RIP software, software for people of all ages and backgrounds, now encompasses a perfect package with all of the features needed to reproduce beautiful full-color finishes in high definition with the easiest set of controls to use to navigate with!!

	CJV150-130	CJV150-160						
On-demand	l piezo head							
540 dpi, 720 d	dpi, 1080 dpi, 1440 dpi							
in)	1,361 mm (53.5 in)	1,610 mm (63.3 in)						
in)	1,371 mm (53.9 in)	1,620 mm (63.7 in)						
	Wat	er-based sublimation ink						
Y, K) only avai	lable in emerging countries S	Sb53*1 (BI, M, Y, K, DK, LBI, Lm)						
(, K) only avail	lable in emerging countries S	b54 (Bl, M, Y, K, LBl, Lm)						
Ink pack*5 /2 I	L Ink pack*4 S	Sb53: 440 ml lnk cartridge/2 L lnk pack**						
Ink pack*5 /2 I	L Ink pack*4 S	b54: 440 ml Ink cartridge/2 L Ink pack*4						
n Technology)	(Only applies to white and silver inks)							
1.0 mm	or less							
40 kg (88	lb) or less							
ass A / FCC d	lass A / ETL UL 60950							
C, Low voltage	e, and Machinery directive) / CB							
/ REACH and	Energy Star / RCM							
2.0, for E-mail	notification function							
hase (AC 100	–20V / AC 220–240V)							
100V: 1.44kW	200V: 1.92kW							
(68-86°F), Hu	midity: 35–65% Rh (Non condensing)							
1,392 mm	2,525 mm × 700 mm × 1,392 mm	2,775 mm × 700 mm × 1,392 mm						
5 in)	(99 in × 28 in × 55 in)	(109 in × 28 in × 55 in)						
	157 kg	168 kg						

For SIGN GRAPHICS

Inkjet printer/cutter with silver ink





## MIMAKI'S HIGH-SPECIFICATION ENTRY MODEL







*M*imaki<sup>®</sup>



## EXCEPTIONALLY BRILLIANT PRINTS

## CAPTIVATING PRINTS

### Silver ink inspires imagination

Newly developed SS21 silver ink is available. Being 1.67\* times brighter than conventional silver inks, SS21 ink adds brilliant and beautiful mirror effects to print results.

\* Obtained from comparison measurements of SS21 and ES3 silver inks conducted at the Mimaki HQ.



Silver color added to catch copies and logos strikes a profound impression on the viewers, which makes silver printing very appealing.

#### The intensity of brightness in the silver ink varies as per the viewing angle. Such a high level of brightness attracts the viewer

### Achieves a higher level of expression by using orange and light black inks

By using the orange ink as a process color, 94.8% of the PANTONE color chart is covered with approximate colors. Thanks to a wider gamut with the orange ink, food freshness can be simulated, and corporate colors can be faithfully represented. The light black ink improves the printed grayscale gradation. It also faithfully represents monochrome data without introducing unexpected color shifts. Light black ink ensures a more accurate color representation.

### The "Print and Cut" function immediately turns an idea into a real product

The multiple functions of the CJV150-75/107/130/160 models enable high-quality printing and high-accuracy cutting. The CJV150 alone completes the production of labels, stickers, and vehicle wrapping films.

#### The continuous-register mark-detection function enables continuous media cutting.

The CJV150 automatically detects all register marks set by the RasterLink6 on the media, and cuts contour lines precisely by utilizing simultaneous automatic calibration



#### The segment correction function facilitates precision cutting over longer-length prints.

This function detects intermediate register marks and enables four-point corrections for each segment to ensure accurate contour cutting over longer-length prints, even if the image is distorted.

#### Print and cut on no-register mark media / Cut and print function

Media up to 1m in length do not require register marks. This function reduces the medium requirements

#### The over-cut and corner-cut functions ensure clearly cut edges with no residues.

The over-cut function ensures sharply cut edges with no residues by making a cross cut at the start and end positions of the contour cutting. The corner-cut function ensures sharply cut edges by making cross cuts at each corner.



#### Versatile cutting methods satisfy a range of market demands.

"Normal cut" cuts the contour of printed image and holds the cut image on media. "Die cut" completely cuts the printed image from media. "Half cut" produces a unique perforated cutting, leaving a few connection points that retain the printed image on media. This function is useful for clipping images from media, and also used as crease lines.

#### The clamp-pressure automatic-switching function enables continuous operation.

The pressure of the media clamps is automatically switched to a set value for printing and cutting. No pressure adjustment by the operator is required during continuous operation.

#### The "Cut and Print" function improves the workability of thin materials.

This function prevents common problems, such as film separation and faulty cut results, by cutting the media before printing.

## **Banding reduction**

The reputable anti-banding function MAPS2 has been improved to MAPS3\*. Advanced MAPS3 scatters ink droplets and overlaps prints on areas of frequent banding.



## Advanced ink jet technology ensures high-guality printing at all times

Mimaki's unique advanced ink jet technology allows the print head to jet each ink droplet at the appropriate jetting angle while retaining excellent ink droplet circularity. This advanced technology ensures that texts, lines, and edges are clearly printed.



Printing without waveform management

## 3-Way intelligent heater

A 3-way intelligent heater fixes droplets placed on media. By using Mimaki's original technology in heating the media at a controlled temperature, ink can be fixed while maintaining high color development and high image quality. Thus the CJV150 provides both steady color development and easy handling after printing.

- Pre-heater: Heats media to the optimum temperature before printing. - Print heater:
- Dries ink after it lands on media before it bleeds, improving color development. - Post-heater: Enhances ink drying and achieves stable take-up.

## Smooth gradation printing


By ejecting 3 different dot sizes (Large/Medium/Small), images are expressed smoothly without graininess, even in large-format printing. Furthermore, the Large dot size is 35pl and by using this size effectively, light and shade can be expressed firmly while using higher printing speed settings.







Printing with optimized waveform

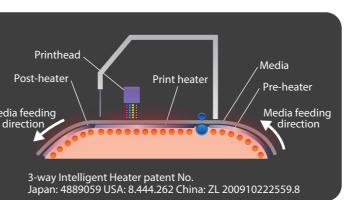

## SIMPLE AND PRACTICAL FOR EVERYDAY USE

## Continuous operation support pack to minimize downtime


The CJV150-75/107/130/160 is prepared with the following continuous operation support pack to minimize downtime in case of emergency such as machine failure.

#### Productivity maintenance - NRS\*1

The NRS substitutes defective nozzles with non-defective nozzles until the technician arrives. This feature enables uninterrupted print operations and continuous productivity.

\*1 NRS: Nozzle Recovery System

\*2 10 nozzles per nozzle row can be registered.

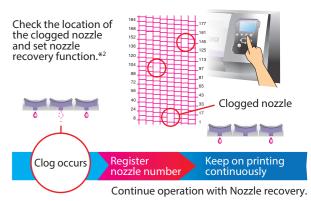

### Prevention of print quality problems - NCU\*

The CJV150 is equipped with Mimaki's original automatic NCU. Clogged nozzles are automatically detected and cleaned by the NCU. If the clogging is not resolved by cleaning, the CJV150 automatically sets the nozzle recovery function NRS and resumes printing. These functions significantly reduce the waste printing caused by clogged nozzles during a continuous printing run.

\* NCU: Nozzle Check Unit

#### Stable printing using the ink circulation system - MCT\*

MCT is a standard feature included to effectively avoid the settling of white and silver pigments in the ink lines by regularly circulating the ink. It prevents print troubles and enables stable output from the start of operation. In addition, MCT contributes to reduction of ink waste, thereby supporting environmentally and economically friendly applications.

\* MCT is only available for white and silver inks. (MCT = Mimaki Circulation Technology)

